




# RIGID TUBE RTD's PLASTICS

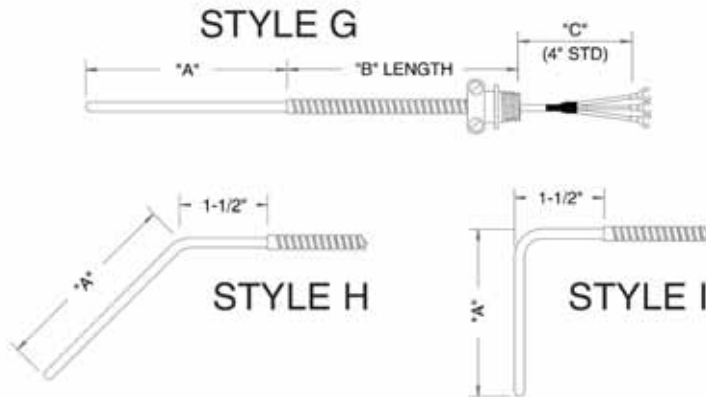

**NOTE:**  
 What is shown  
 in photo

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
R	T	D	C	A												

1 (R)

2 (T)

3 (D)

**STYLE**

4&5 (CA) Rigid Tube

**ELEMENT TYPE**

6 (A) 2-Wire Single  
 (B) 3-Wire Single  
 (D) 2-Wire Dual  
 (E) 3-wire Dual

**SHEATH DIAMETER**  
 or for RING/LUG use  
 BOLT/STUD SIZE

7 (1) 1/8  
 (2) 3/16  
 (3) 1/4  
 (4) 5/16  
 (5) #10

**SHEATH LENGTH**

8 (#) Example: 06-6" L

**WHOLE #**

9 (#) Use XX for Ring/Lug

**FRACTIONAL**

10 (A) None  
 (B) 1/16  
 (C) 1/8  
 (E) 3/16  
 (G) 1/4  
 (J) 3/8  
 (L) 1/2  
 (N) 5/8  
 (Q) 3/4  
 (S) 7/8

**SEATH MOUNTING**

17 \*USE SEATH MOUNTING FITTINGS CHART  
 16 \*USE SEATH MOUNTING FITTINGS CHART

**LEADWIRE TERMINATION**

15 (0) None  
 (1) 2 1/2 Split Leads w/ #8 Spade Lugs  
 (2) Standard Male Plug  
 (3) Standard Plug w/ Mating Jack  
 (4) 2 1/2 Split Leads w/ Spade Lugs & BX Connector  
 (5) Standard Female Jack  
 (6) 2 1/2 Split Leads  
 (7) Mini Male Plug  
 (8) Mini Female Jack  
 (9) Mini Plug/Jack  
 (A) 2 1/2 Split Leads w/ 1/4 Push-on Connectors  
 (Z) Switchcraft Connectors (M & F)

**LEADWIRE LENGTH**

14 (#)

13 (#) example: 048 = 48"L

12 (#)

**LEADWIRE TYPE**

11 (0) Solid Fiberglass  
 (1) Solid Fiberglass w/ SS Flex Armor  
 (2) Stranded Fiberglass w/ SS Overbraid  
 (3) Solid Fiberglass w/ SS Overbraid  
 (4) Stranded Fiberglass w/ SS Flex Armor  
 (5) Stranded Fiberglass  
 (6) Stranded Teflon w/ SS Overbraid  
 (7) Stranded Teflon w/ SS Flex Armor  
 (8) Stranded Fiberglass w/ SS Overbraid & SS Flex Armor  
 (G) Hi-Temp Fiberglass  
 (H) Hi-Temp Fiberglass w/ SS Flex Armor  
 (J) Solid Teflon  
 (K) Solid Teflon w/ SS Flex Armor  
 (L) Solid Teflon w/ SS Overbraid  
 (M) Stranded Teflon  
 (P) Stranded Shielded Teflon  
 (S) Stranded PVC  
 (U) Kapton  
 (Z) Stranded Teflon Singles or Stranded Fiberglass Singles

**Submit**