




SPRING ADJUSTABLE RTD's PLASTICS

STYLE A & B

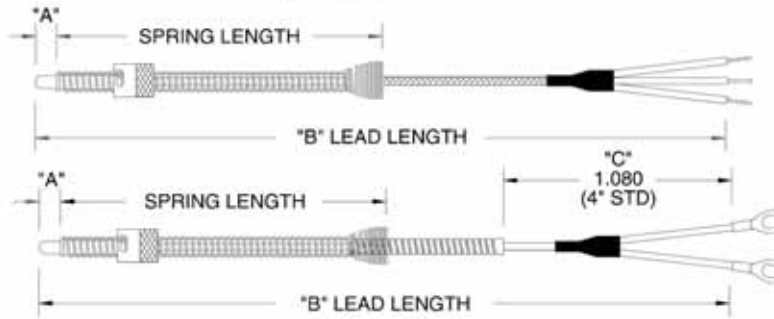

NOTE:
 What is shown
 in photo

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17

R T D A O - - - - - - - - - - - - - - -

- 1 (R)
- 2 (T)
- 3 (D)

STYLE
 4&5 (AO) Spring Adjustable

- ELEMENT TYPE**
- 6 (A) 2-Wire Single
 - 6 (B) 3-Wire Single
 - 6 (D) 2-Wire Dual
 - 6 (E) 3-wire Dual

- SHEATH DIAMETER**
 or for RING/LUG use
 BOLT/STUD SIZE
- 7 (1) 1/8
 - 7 (2) 3/16
 - 7 (3) 1/4
 - 7 (4) 5/16
 - 7 (5) #10

SHEATH LENGTH
 8 (#) Example: 06-6" L

WHOLE #
 9 (#) Use XX for Ring/Lug

- FRACTIONAL**
- 10 (A) None
 - 10 (B) 1/16
 - 10 (C) 1/8
 - 10 (E) 3/16
 - 10 (G) 1/4
 - 10 (J) 3/8
 - 10 (L) 1/2
 - 10 (N) 5/8
 - 10 (Q) 3/4
 - 10 (S) 7/8

SEATH MOUNTING
 17 *USE SEATH MOUNTING FITTINGS CHART
 16 *USE SEATH MOUNTING FITTINGS CHART

- LEADWIRE TERMINATION**
- 15 (0) None
 - 15 (1) 2 1/2 Split Leads w/ #8 Spade Lugs
 - 15 (2) Standard Male Plug
 - 15 (3) Standard Plug w/ Mating Jack
 - 15 (4) 2 1/2 Split Leads w/ Spade Lugs & BX Connector
 - 15 (5) Standard Female Jack
 - 15 (6) 2 1/2 Split Leads
 - 15 (7) Mini Male Plug
 - 15 (8) Mini Female Jack
 - 15 (9) Mini Plug/Jack
 - 15 (A) 2 1/2 Split Leads w/ 1/4 Push-on Connectors
 - 15 (Z) Switchcraft Connectors (M & F)

LEADWIRE LENGTH

- 14 (#)
- 13 (#) example: 048 = 48"L
- 12 (#)

- LEADWIRE TYPE**
- 11 (0) Solid Fiberglass
 - 11 (1) Solid Fiberglass w/ SS Flex Armor
 - 11 (2) Stranded Fiberglass w/ SS Overbraid
 - 11 (3) Solid Fiberglass w/ SS Overbraid
 - 11 (4) Stranded Fiberglass w/ SS Flex Armor
 - 11 (5) Stranded Fiberglass
 - 11 (6) Stranded Teflon w/ SS Overbraid
 - 11 (7) Stranded Teflon w/ SS Flex Armor
 - 11 (8) Stranded Fiberglass w/ SS Overbraid & SS Flex Armor
 - 11 (G) Hi-Temp Fiberglass
 - 11 (H) Hi-Temp Fiberglass w/ SS Flex Armor
 - 11 (J) Solid Teflon
 - 11 (K) Solid Teflon w/ SS Flex Armor
 - 11 (L) Solid Teflon w/ SS Overbraid
 - 11 (M) Stranded Teflon
 - 11 (P) Stranded Shielded Teflon
 - 11 (S) Stranded PVC
 - 11 (U) Kapton
 - 11 (Z) Stranded Teflon Singles or Stranded Fiberglass Singles

Submit